



TRAILER PLUG ADAPTER BRACKET

TLR715101



SUITED TO:

GWM TANK 300



PRE-INSTALLATION



Read through this installation guide before proceeding.



Fitting time is approx. 45 minutes.



Socket Spanner set, In-hex sockets or Allen keys

FITTING KIT

QUANTITY	PART
1	TLR715101 – Trailer Plug Adapter Bracket
2	M4 x 16 mm Phillips Pan Head Bolt - Stainless Steel
2	M4 Nyloc Nut – Stainless steel
2	M4 x 9 mm Flat Washers – Stainless Steel
2	150 mm Cable Ties




NOTE:

This Trailer Plug Bracket provides a mounting location for a 7 or 12 pin flat trailer plug to the rear of the GWM Tank 300.



FITTING INSTRUCTIONS

1. Remove the 2 x OEM trailer plug bracket mounting bolts shown in *Photo 1*.
2. Place TLR Products Trailer Plug Bracket into position, place OEM bracket over the top (this is optional pending wiring) and re-install the previously removed OEM mounting bolts.
3. Install 7 or 12 pin flat plug and complete wiring to finalise installation.

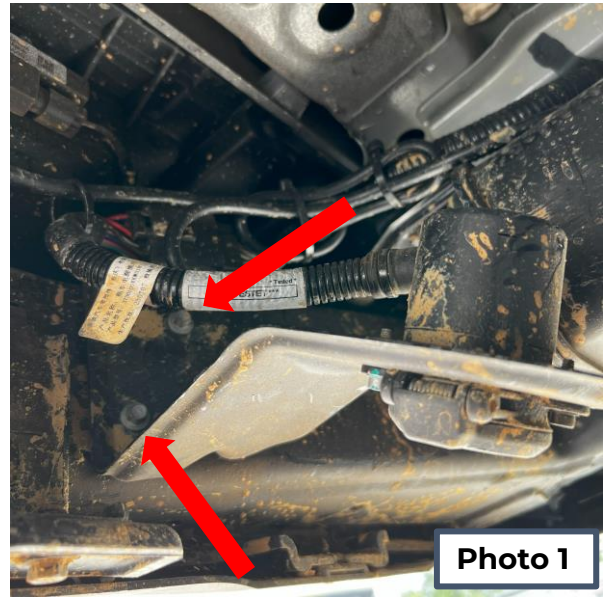

TLR Products
65 Northville Drive
Barnsley NSW 2278



[instagram.com/tlrproducts](https://www.instagram.com/tlrproducts)
[facebook.com/tlrproducts](https://www.facebook.com/tlrproducts)



hello@tlrproducts.com.au
www.tlrproducts.com.au